
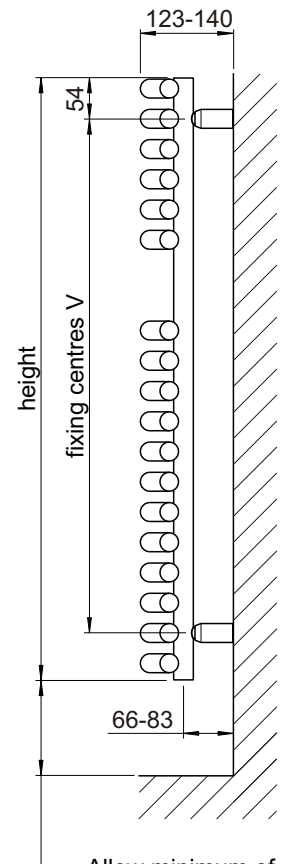
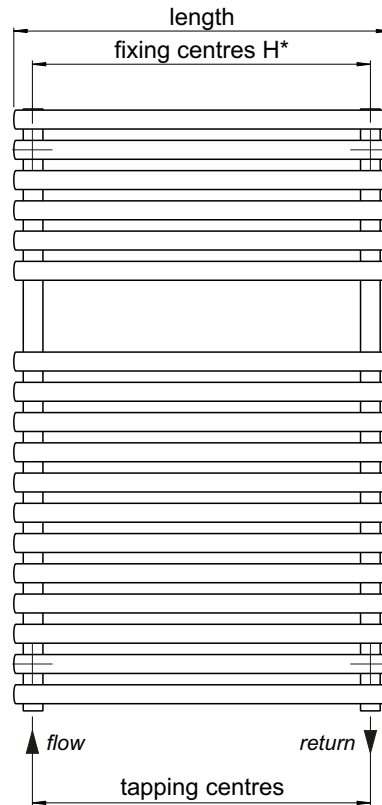


*dim same as tapping centres

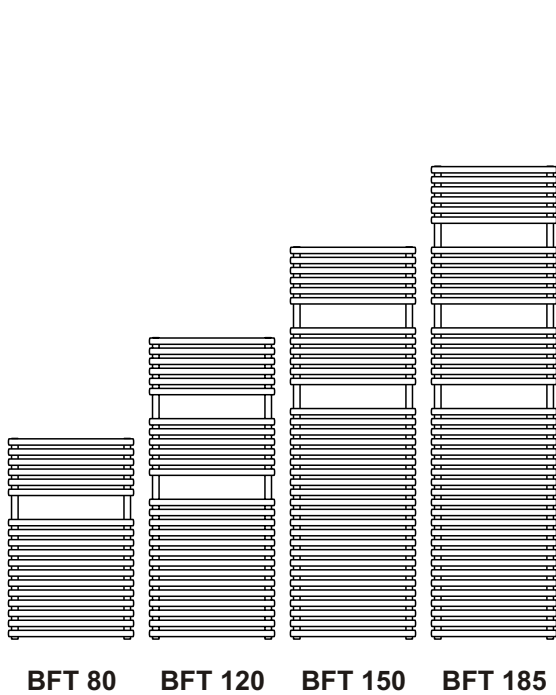

note: flow & return can be reversed if required

Allow minimum of 100mm for valves

All dimensions shown are in millimetres

- Test pressure: **13 BAR**
- Max working pressure: **10 BAR**
- Max working temperature: **100° C**
- All steel construction: **dia 25mm x 1.2mm tubes**
dia 26mm x 1.5mm headers
- Connections: **½ inch BSP underside tappings**

For optional **Supplementary Heater** see separate sheet as fitting this will affect pipe centres. Please check before drilling.

Not suitable for use on domestic hot water system

Heat output determined in accordance with EN 442

Manufactured for Bisque by Zehnder

Model	Output - White			Output - Chrome			Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Ctrs V ± 2mm
	ΔT=50K Watts	ΔT=60K Watts	n	ΔT=50K Watts	ΔT=60K Watts	n						
BFT 80-50	418	522	1.22	275	348	1.29	4.3	8	796	497	448	680
BFT 80-60	492	613	1.21	323	409	1.29	5.0	10	796	597	550	680
BFT 80-75	603	752	1.21	395	500	1.29	6.0	12	796	747	701	680
BFT 120-50	601	752	1.23	397	501	1.28	6.1	12	1196	497	448	1080
BFT 120-60	709	886	1.22	467	589	1.27	7.2	14	1196	597	550	1080
BFT 120-75	870	1085	1.21	571	720	1.27	8.8	17	1196	747	701	1080
BFT 150-50	792	993	1.24	527	668	1.30	8.2	16	1556	497	448	1440
BFT 150-60	935	1170	1.23	624	791	1.30	9.6	19	1556	597	550	1440
BFT 150-75	1148	1434	1.22	770	974	1.29	11.6	23	1556	747	701	1440
BFT 185-50	940	1178	1.24	631	797	1.28	9.7	19	1876	497	448	1760
BFT 185-60	1099	1375	1.23	742	937	1.28	11.3	22	1876	597	550	1760
BFT 185-75	1339	1673	1.22	909	1148	1.28	13.7	27	1876	747	701	1760