


note: flow & return can be reversed if required

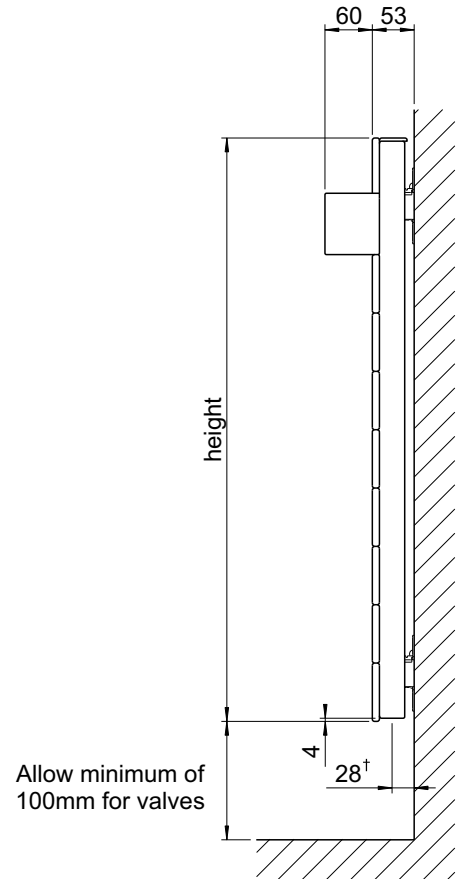

† Pipe connections from wall to radiator are not possible as there is insufficient space for valves.

All dimensions shown are in millimetres

- Test pressure: **5.2 BAR**
- Max working pressure: **4 BAR (6 or 10 available)**
- Max working temperature: **120° C**
- All steel construction: **2mm header thickness**
1.25mm panel thickness
- Connections: **½ inch BSP underside tappings**

Not suitable for use on domestic hot water system

Heat output determined in accordance with EN 442

Reg. Number 2300E-2308E

Manufactured for Bisque by Arbonia AG of Switzerland

Model	Output ΔT=50K Watts	Output ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 2mm
DHT 73-60	422	531	1.26	3.2	13	739	600	552	400
DHT 73-80	563	708	1.26	4.3	18	739	800	752	600
DHT 73-100	704	886	1.26	5.6	19	739	1000	952	800