



View on Rear of Radiator

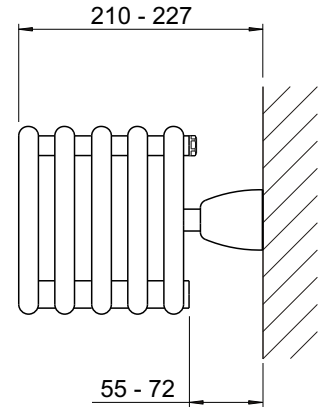

For pipe connections from floor, use elbow connectors (not supplied)

All dimensions shown are in millimetres

Test pressure: **12 BAR**
 Max working pressure: **8 BAR**
 Max working temperature: **95° C**
 All steel construction: **oval dia 18 x dia 36 x 1.5mm tubes**
 Connections: **½ inch BSP rear facing tappings**

Not suitable for use on domestic hot water system

Heat output determined in accordance with EN 442

Designed by Paul Priestman & manufactured for Bisque in Italy

Model	Output ΔT=50K Watts	Output ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 2mm
OHT5-60	369	459	1.20	2.4	9	172	600	428	564