


SLIDING DOOR SOFT CLOSE, SELF CLEANING GLIDE




**Toughened Glass**  
Strong and safe

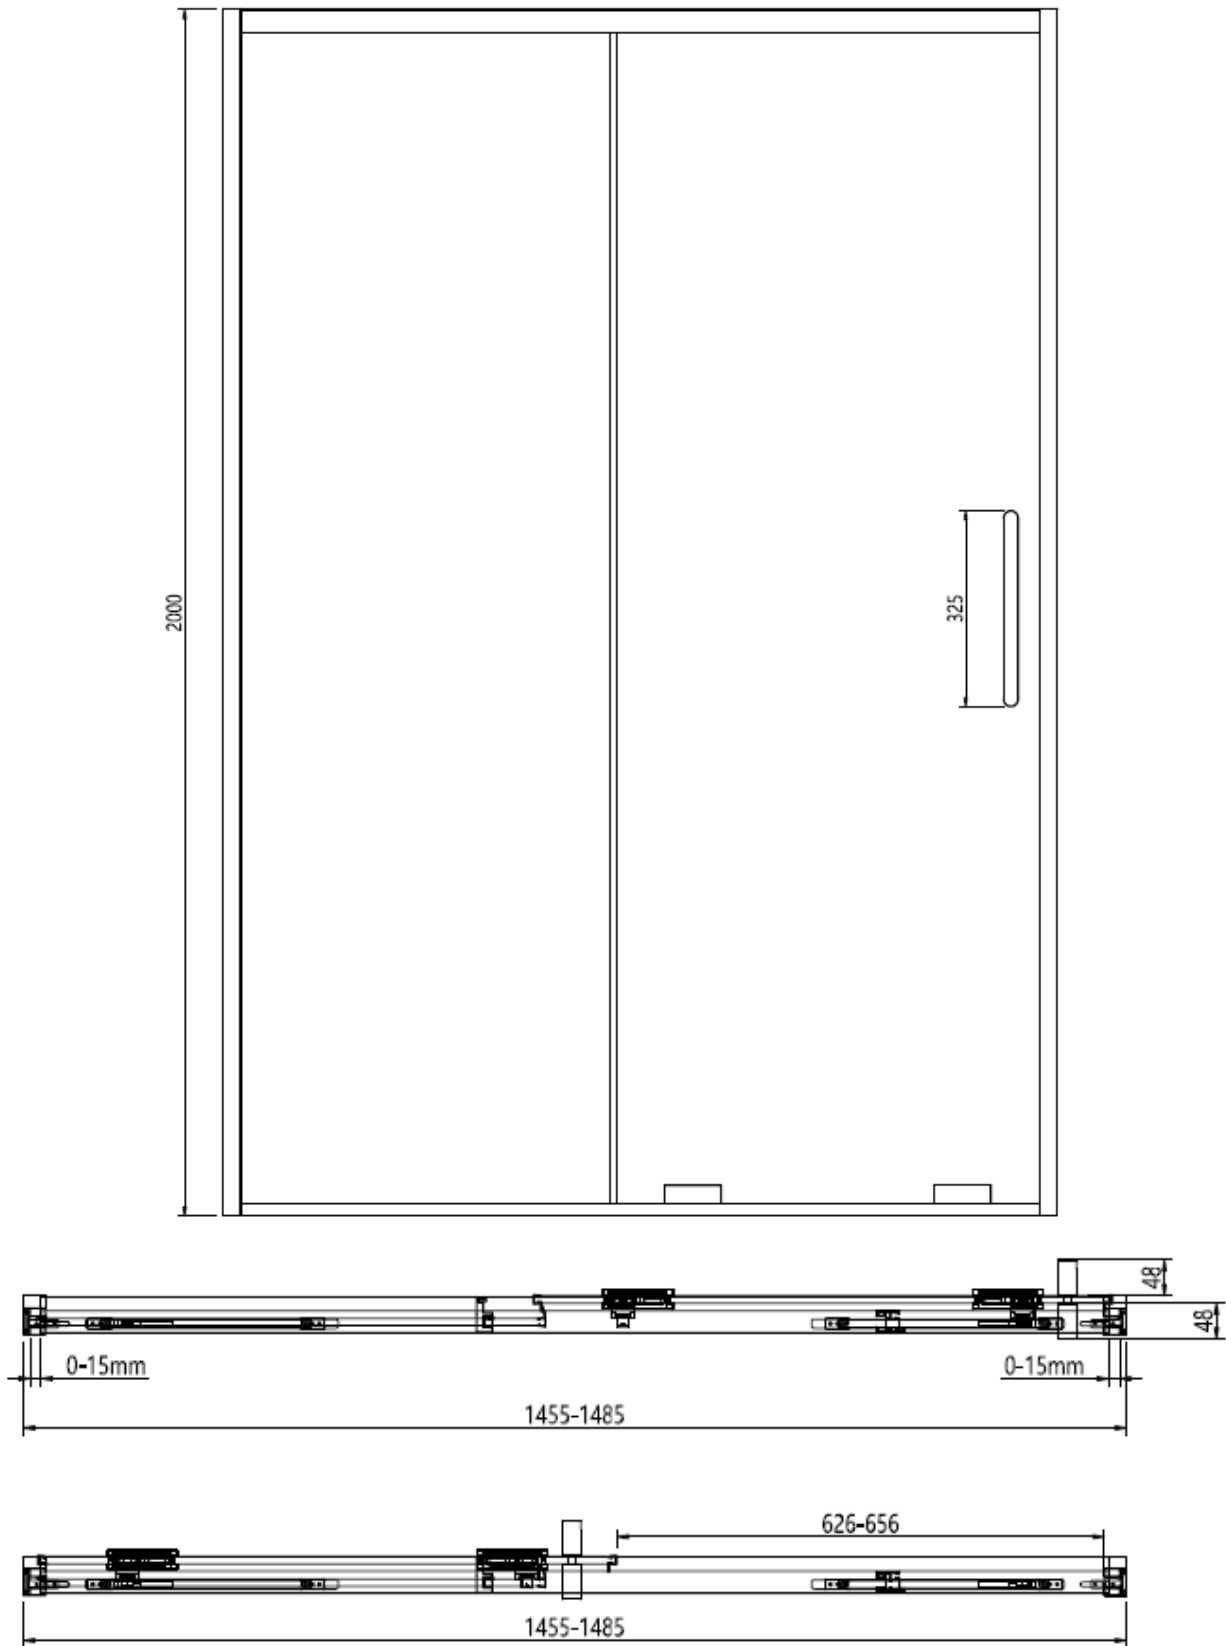


**Protective Finish**  
Easy to clean



**Lifetime Guarantee**  
Peace of mind

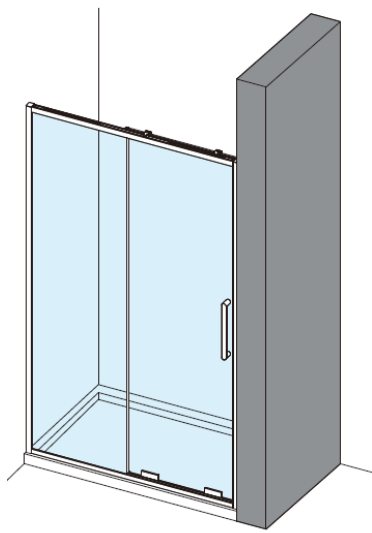


Left Hand

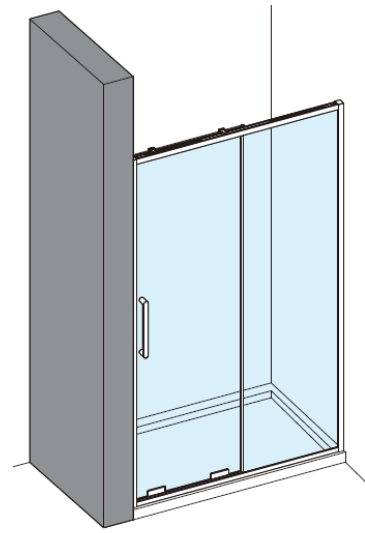


Right Hand



The bottom rollers are fitted with a specially designed brush comes with a brush (the black part marked with red arrow). The brush will clean the track during opening and closing of the moving door, and to ensure the rollers smoothly run on the track, assisting the soft close open and closing mechanism.

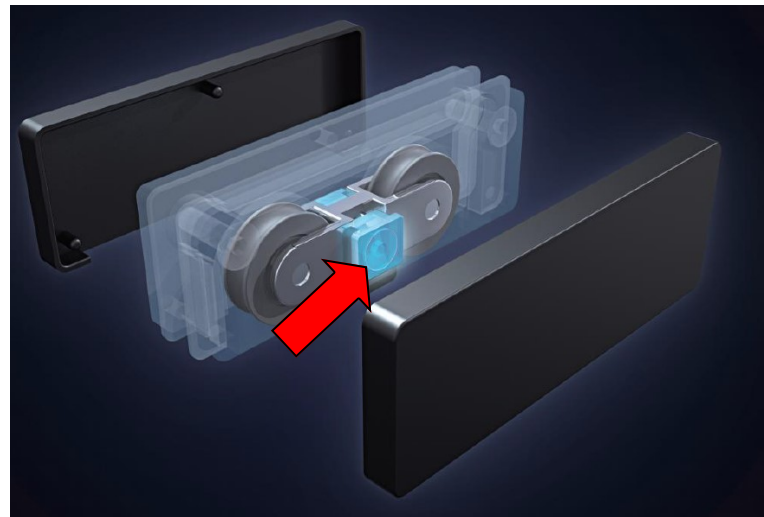

Brushed Brass




Polished Stainless




Brushed Stainless




CODE	SLIDING DOOR	ADJUSTMENT	DOOR OPENING	Width	Height
	COLOUR	mm	mm	mm	mm
OXSLFC1500	Brushed Brass	1455-1485	626	1500	2000
OXSLSC1500	Polished Stainless Steel	1455-1485	626	1500	2000
OXSLVC1500	Brushed Stainless Steel	1455-1485	626	1500	2000

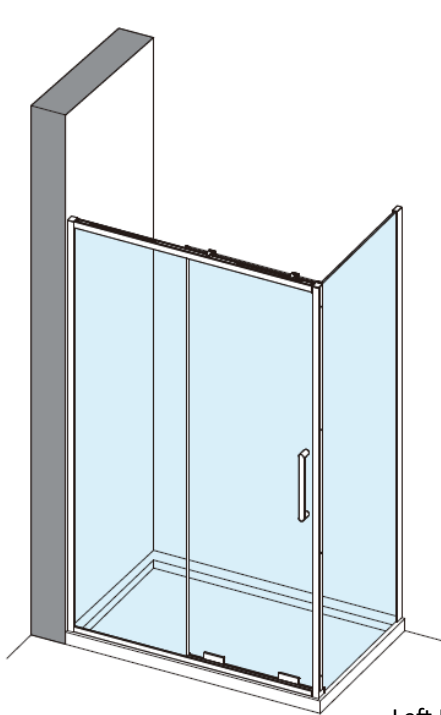

Left Hand

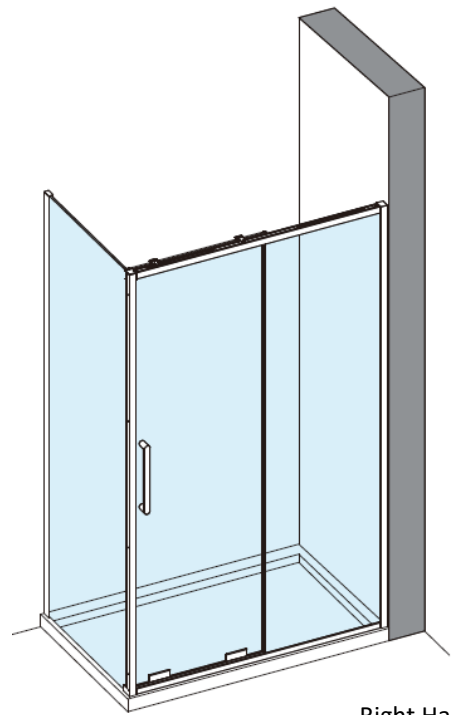

Right Hand



Brushed Brass



Polished Stainless



Brushed Stainless

CODE	SLIDING DOOR	ADJUSTMENT with Side Panel	DOOR OPENING	Width	Height
	COLOUR	mm	mm	mm	mm

OXSLFC1500	Brushed Brass	1470-1485	626	1500	2000
------------	---------------	-----------	-----	------	------

OXSLSC1500	Polished Stainless Steel	1470-1485	626	1500	2000
------------	--------------------------	-----------	-----	------	------

OXSLVC1500	Brushed Stainless Steel	1470-1485	626	1500	2000
------------	-------------------------	-----------	-----	------	------

CODE	SLIDING DOOR SIDE PANEL	ADJUSTMENT	DOOR OPENING	Width	Height
	COLOUR	mm	mm	mm	mm

OXSLSPFC0800	Brushed Brass	765-790	NA	800	2000
--------------	---------------	---------	----	-----	------

OXSLSPSC0800	Polished Stainless Steel	765-790	NA	800	2000
--------------	--------------------------	---------	----	-----	------


OXSLSPVC0800	Brushed Stainless Steel	765-790	NA	800	2000
--------------	-------------------------	---------	----	-----	------

OXSLSPFC0900	Brushed Brass	865-890	NA	900	2000
--------------	---------------	---------	----	-----	------


OXSLSPSC0900	Polished Stainless Steel	865-890	NA	900	2000
--------------	--------------------------	---------	----	-----	------

OXSLSPVC0900	Brushed Stainless Steel	865-890	NA	900	2000
--------------	-------------------------	---------	----	-----	------

1500 mm door and 800 side panel

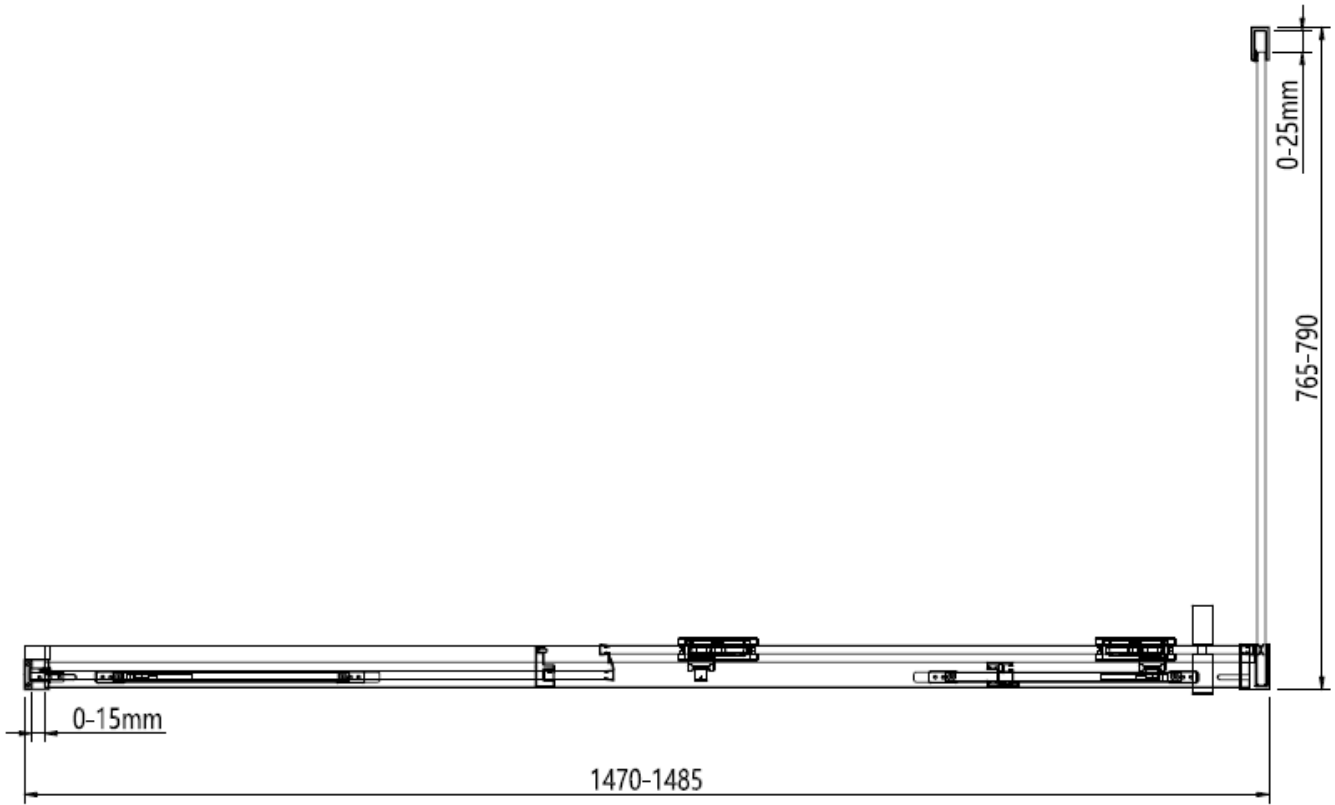


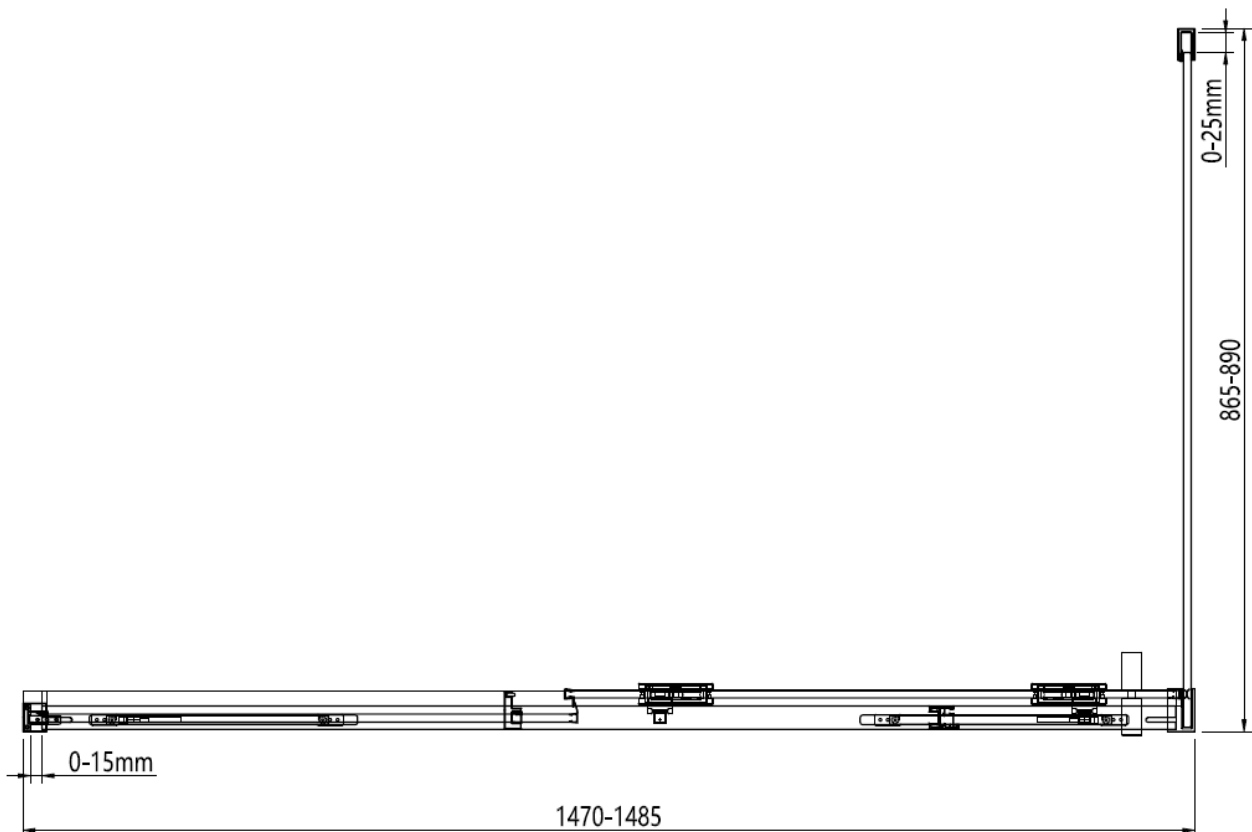













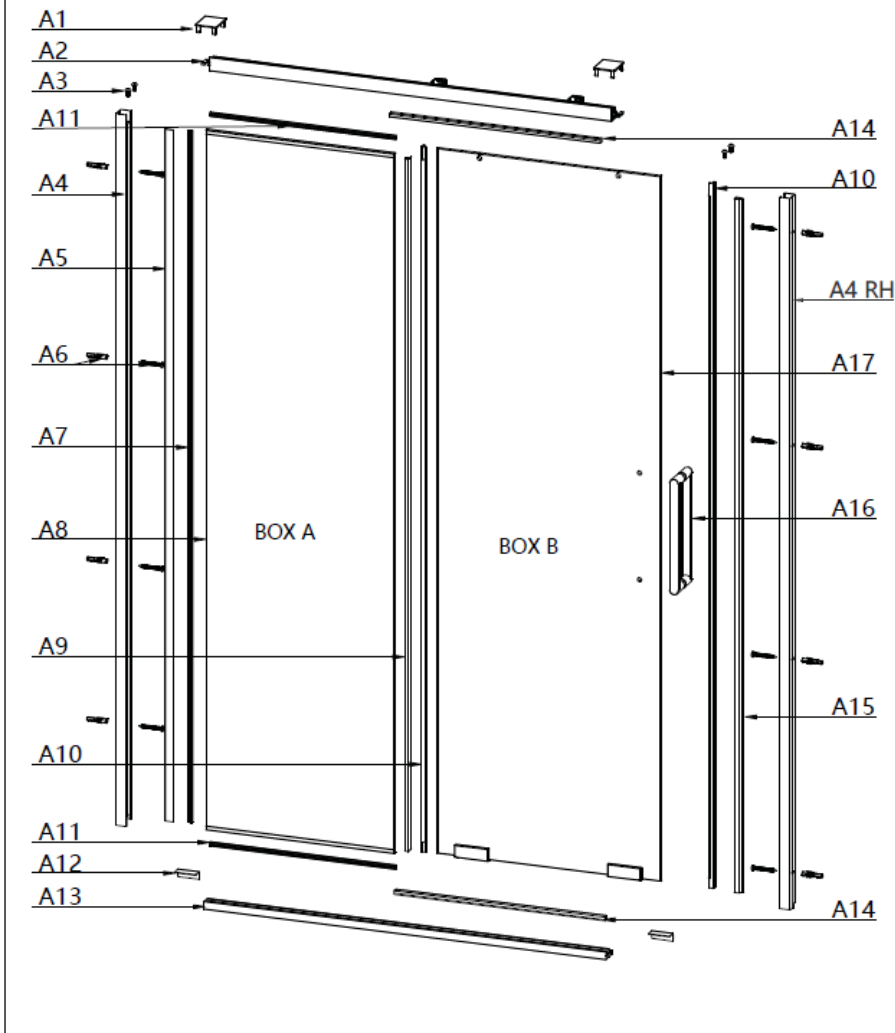










1500 mm door and 900 side panel



# Optix 10 Soft Close Sliding Door

Manufactured to: BS EN 14428



<b>A 1</b>	Wall profile cover cap  x2	<b>A 8</b>	Fixed panel assembly  x1	<b>A 15</b>	Closing side wall profile cover  x1
<b>A 2</b>	Top rail assembly  x1	<b>A 9</b>	Fixed panel water seal  x1	<b>A 16</b>	Handle  x1
<b>A 3</b>	Round head hex screw M4*10  x4	<b>A 10</b>	Moving panel seal  L  R 1+1	<b>A 17</b>	Moving panel  x1
<b>A 4</b>	Wall profiles  L  R 1L+1R	<b>A 11</b>	Fixed panel top and bottom seals  x2	<b>A 18</b>	Allen Key 4mm  3mm  2.5mm 
<b>A 5</b>	Long seal for fixed panel  x1	<b>A 12</b>	Bottom rail end cap  x2	<b>A 19</b>	Wedge gasket tool  x1
<b>A 6</b>	Wall plug and 4x35mm screw  8+8	<b>A 13</b>	Bottom rail  x1	<b>B 9</b>	PVC spacer  x4
<b>A 7</b>	Wall profile seal  x1	<b>A 14</b>	Top & bottom profile trim  x2	<b>B 8</b>	Wall profile cover cap  x1



## Optix 10 Side Panel for Slider

